

FUSIONSEEKER DS-50S5

HIGH ACCURACY SENSORY SOLAR TRACKER CONTROLLER



INSTRUCTION MANUAL

Revision 3

TABLE OF CONTENTS

1. INTRODUCTION	3
2. TECHNICAL SPECIFICATIONS.....	4
3. INSTALLATION INSTRUCTIONS	5
3.1 <i>Setting the input voltage range</i>	5
3.2 <i>Setting the tracking accuracy</i>	6
3.3 <i>Mounting FUSIONSEEKER on the solar "receiver"</i>	9
3.4 <i>Connecting FUSIONSEEKER to supply voltage and motor</i>	11
3.5 <i>The use of limit switches</i>	12
3.6 <i>Grounding</i>	13
4. RECOMMENDATIONS FOR SOLAR TRACKER STRUCTURE	13
5. WARRANTY	14

1. INTRODUCTION

FUSIONSEEKER DS-50S5 is a **universal sensory solar tracker controller** designed to be used with **all** single-axis solar trackers (low concentration ratio solar concentrators included) that use permanent magnet DC motors for moving. Its superiorities are **high tracking accuracy, great electrical capabilities, high reliability, long expected life time and also watertight "2in1" polycarbonate housing that serves as a "shadow maker" for sensors and as an all weather resistant protection for electronics**. Installation is also very simple - because all components are packed in **one** "2in1" housing. You just fix it on to the solar "receiver", connect two wires to supply voltage and other two wires to motor and that's it. And don't forget it's maintenance free - install and forget!

The heart of FUSIONSEEKER DS-50S5 is its **100% solid state** (no moving parts inside, no potentiometers, no relays!!!) and software free (all features are implemented with pure hardware - no reset buttons, no Windows[®] blue screens!!!) electronics that for functioning needs so little power that energy consumption (about 0,001 kWh per day) can simply be ignored. DS-50S5 is working on a principle of equalized output signals of its two light sensors. When output signals from sensors are different (solar "receiver" is not faced precisely to the sun - "2in1" housing is shading one light sensor) electronics, with the help of POWER MOS-FET transistors, turns on the motor and keeps it running. Immediately after output signals from sensors equalize (solar "receiver" is again faced precisely to the sun) the motor is turned off and with the help of **electronic brake** instantly stopped. This electronic brake is in function always but it becomes absolutely necessary in case you set DS-50S5's accuracy to highest level (without brake system oscillates!). This sequence is repeating throughout all day till sunfall when tracker (motor) stops facing to the west. Next morning when first sun rays appear DS-50S5 with its additional (third) **bottom sensor** notices that and turns on the motor to move the tracker to the east. After some 5 minutes (it depends on the speed of tracker's rotation) tracker is facing to the east and sequence described above starts to repeat again. In case when clouds cover the sun DS-50S5 can stop tracking or it can turn solar tracker towards the brightest cloud - that depends on what tracking accuracy you choose (set). And immediately after clouds disappear it will in every case turn the tracker toward the sun. In short, FUSIONSEEKER DS-50S5 is a solar tracker controller that will always satisfy all your single-axis sun tracking needs.

2. TECHNICAL SPECIFICATIONS

☀ FUSIONSEEKER DS-50S5 ☀	
Type:	"single-axis"
Supply voltage (DC):	U _{in} = from 10V to 50V DC covered with two selectable input voltage ranges: Voltage range A: U _{in} = from 10V to 25V Voltage range B: U _{in} = from 20V to 50V Factory defaults: voltage range B
Accepted (applicable) supply voltage sources:	Any external power supply or battery
Output current (max. motor current):	I _{out,cont.} = 5A (continuous load!!!) I _{out,10s} = 6A (up to 10 seconds) I _{out,max} = 20A (short duration - for motor startup)
Output voltage (motor voltage):	U _{out} = U _{in} - 0,3V at I _{out} = 2,5A U _{out} = U _{in} - 0,6V at I _{out} = 5A
Electronics self consumption:	at U _{in} = 12V just 0,8mA at U _{in} = 24V only 1,3mA (and intelligently built electronics consume always the same without regard to DC motor being in operation or not!)
Tracking accuracy:	up to +0,05 degree at 1000W/m ² (it is settable) Factory defaults: ± 0,3 degree (at 1000W/m ²)
Electronic motor brake:	YES
Operating temperature range:	from -25°C to +70°C
Housing:	Material: fiberglass-reinforced polycarbonate (UV and high temperature resistant) Seal: all-round foamed-in PU seal Colour: light grey RAL 7035 IP class: IP 66
Dimensions:	width: 94mm, height: 57mm, length: 94mm
Weight:	0,38kg
Maintenance:	It's maintenance free
Expected life time:	10 years +

3. INSTALLATION INSTRUCTIONS

WARNING! Please read those instructions completely - before starting with installation!

WARNING! Installation can be performed by qualified Electrician only!

The FUSIONSEEKER DS-50S5 solar tracker controller package includes **DS-50S5 with mounting bracket, this instruction manual, warranty page and an invoice (receipt).**

The following sections will guide you how to set parameters of DS-50S5, how to mount it onto the solar "receiver", how to connect supply voltage and motor and where you have to be careful. Read all sections step by step and installation will be easy.

Before you start look at **Figure 1** where all important components of FUSIONSEEKER DS-50S5 are marked - for easier understanding.



Figure 1: Components of FUSIONSEEKER DS-50S5

3.1 Setting the input voltage range

WARNING! You can change the input voltage range only when FUSIONSEEKER DS-50S5 is not connected to supply voltage!

First step is setting the input **voltage range** of DS-50S5 so that it will operate at certain supply voltage **which is always equal to the rated voltage of your actuator motor**. FUSIONSEEKER DS-50S5 can operate at supply voltages from 10V DC to 50V DC which are covered with two selectable voltage ranges:

Voltage range A: U_{in} = from 10V to 25V

Voltage range B: U_{in} = from 20V to 50V

For example, if you want to connect FUSIONSEEKER to 12V accumulator, because your tracker uses 12V permanent magnet DC motor, set it to voltage range **A**. If supply voltage will be between 20V DC and 50V DC, you set nothing because voltage range **B** is factory default setting. Sometimes there is a question what voltage range to choose if input voltage will be 24V. The answer is **A** or **B** but in these cases it is recommended to always choose voltage range **B**.

If you have to change the voltage range please follow the procedure on **Figure 2**.

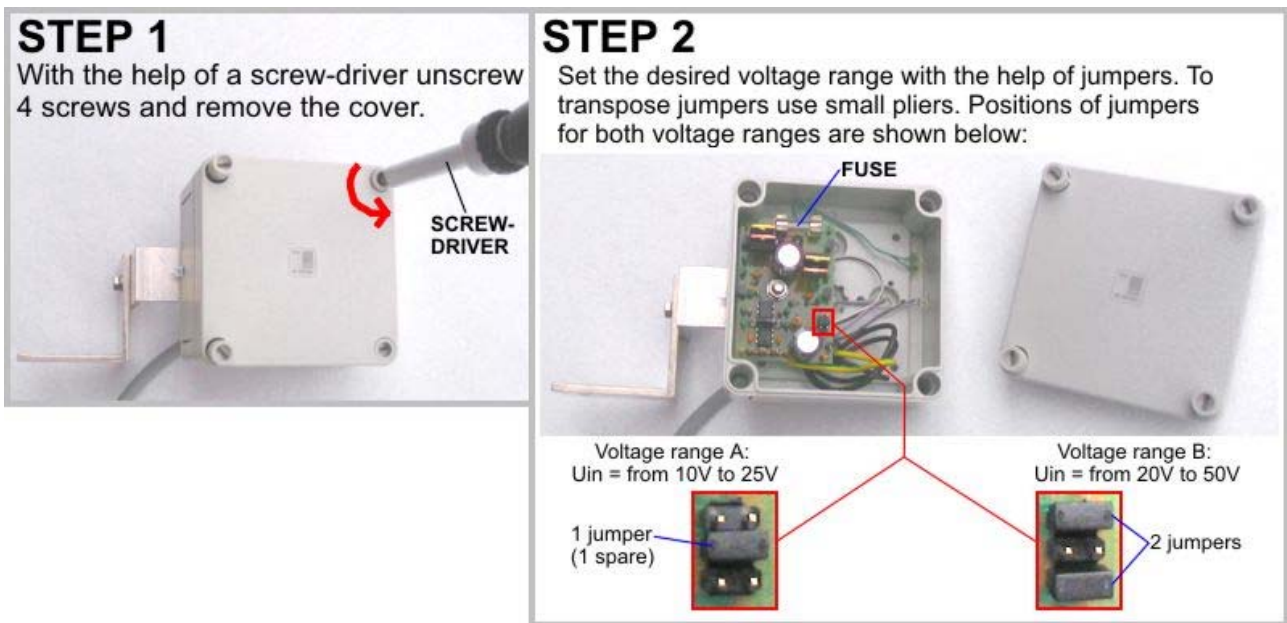


Figure 2: Setting the input voltage range

When you finish clean (if necessary) the PU seal (on the bottom of the cover) that assure watertightness, precisely place the cover back and gently screw all four screws down.

3.2 Setting the tracking accuracy

FUSIONSEEKER DS-50S5 is a single-axis solar tracker controller which provides you the possibility to track the sun **by one axis** with high tracking accuracy of up to $\pm 0,05$ degree. Tracking accuracy is also settable but first we are going to explain some facts.

Sun has a radius of 700.000 km and the distance between earth and sun is on average 149.000.000km. It is not hard to calculate that viewing angle at which we see sun from earth is $\pm 0,27$ degree (absolute value: 0,54 degree) (look at **Figure 3**).

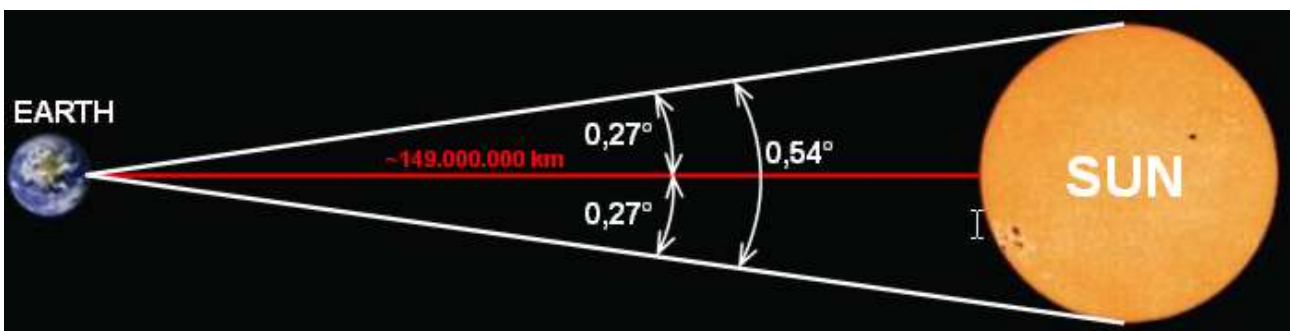


Figure 3: Viewing angle at which we see the sun

When you know the facts you ask yourself: Does single-axis tracking accuracy of better than $\pm 0,27$ degree make any sense? The answer is YES and NO – it depends on the type of solar "receiver". In case of using flat solar "receivers" like are solar cells or water heating solar collectors there is certainly no need for high tracking accuracy - in practice you lose just small amount of energy even with bad accuracy of ± 5 degree - but high accuracy will certainly give best results. Situation

changes when solar concentrators such as V-through or parabolic through solar concentrators, that also can operate using single-axis tracking, are used. In this case tracking accuracy of at least $\pm 0,27$ degree is absolutely necessary because otherwise concentrator can go out of focus and the consequence is drastically decreased output power.

In the beginning of this section it was said tracking accuracy is settable. You change it in the following way:

Open the cover of DS-50S5 as shown on **Figure 5** (step 1). If you look at **Figure 5** (step 2) there are **two equal resistors (marked as R14a and R15a) inserted into gold-plated contact holes of "contact matrix". You change tracking accuracy by changing those two resistors with two of different resistance but same size (1/4W).**

WARNING! You can change resistors R14a and R15a only when FUSIONSEEKER DS-50S5 is not connected to supply voltage!

Before you start setting desired tracking accuracy look at the **Figure 4**. The graph is showing how tracking accuracy depends on different resistance of resistors R14a and R15a.

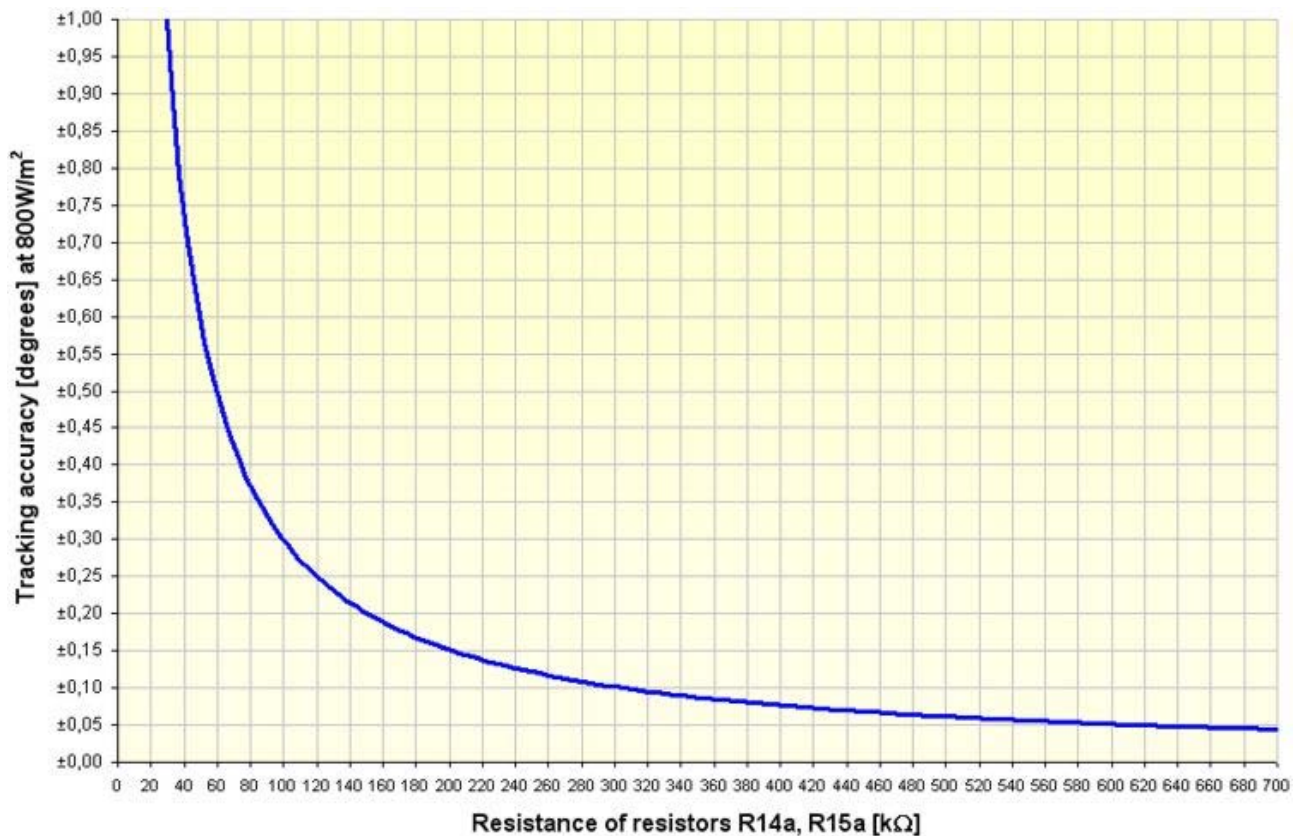


Figure 4: How tracking accuracy depends on different resistance of resistors R14a and R15a at solar irradiance of 800W/m²

With the help of **Figure 4** it is easy to select resistance of resistors R14a and R15a for desired tracking accuracy. If you want high tracking accuracy resistance should be higher than 700kΩ or you can simply "use" **no resistors** (infinite resistance). The other characteristic (which is not shown on **Figure 4**) is that tracking accuracy decreases if solar irradiance decreases. This characteristic of DS-50S5 makes sense when clouds cover the sun because tracking stops if "there is nothing to track". And higher accuracy also means that clouds have to be darker to stop the tracking.

Knowing the facts you now ask yourself how to choose the resistance of R14a and R15a. The answer is dependent on the type of your solar "receiver":

a) "Flat" solar "receivers":

If you have flat solar "receiver" such are solar cells or water heating solar collectors it is recommended to simply do nothing – use factory defaults R14a=R15a=68kΩ. At this resistance tracking accuracy is app. ±0,3 degree at 1000W/m². Maybe you can increase accuracy (R14a=R15a more than 68kΩ) in case of solar cells and slightly decrease it (R14a=R15a less than 68kΩ) in case of water heating solar collectors – experienced users only.

b) Solar concentrators:

When you deal with solar concentrators such are V-through or parabolic through solar concentrators you can also use factory defaults R14a=R15a=68kΩ if tracking accuracy of ±0,3 degree at 1000W/m² is enough. If not DS-50S5 allows you to increase accuracy (R14a=R15a more than 68kΩ) to high levels (up to ±0,05 degree) that will satisfy almost all solar concentrator systems.

If you decide **not to change** factory default tracking accuracy you just clean (if necessary) the PU seal (on the bottom of the cover) that assure watertightness, precisely place the cover back and gently screw all four screws down – procedure is finished for you!

If you decide to change tracking accuracy and you have already bought two new resistors (price is negligible) change resistors as it's step by step described on the **Figure 5** below.

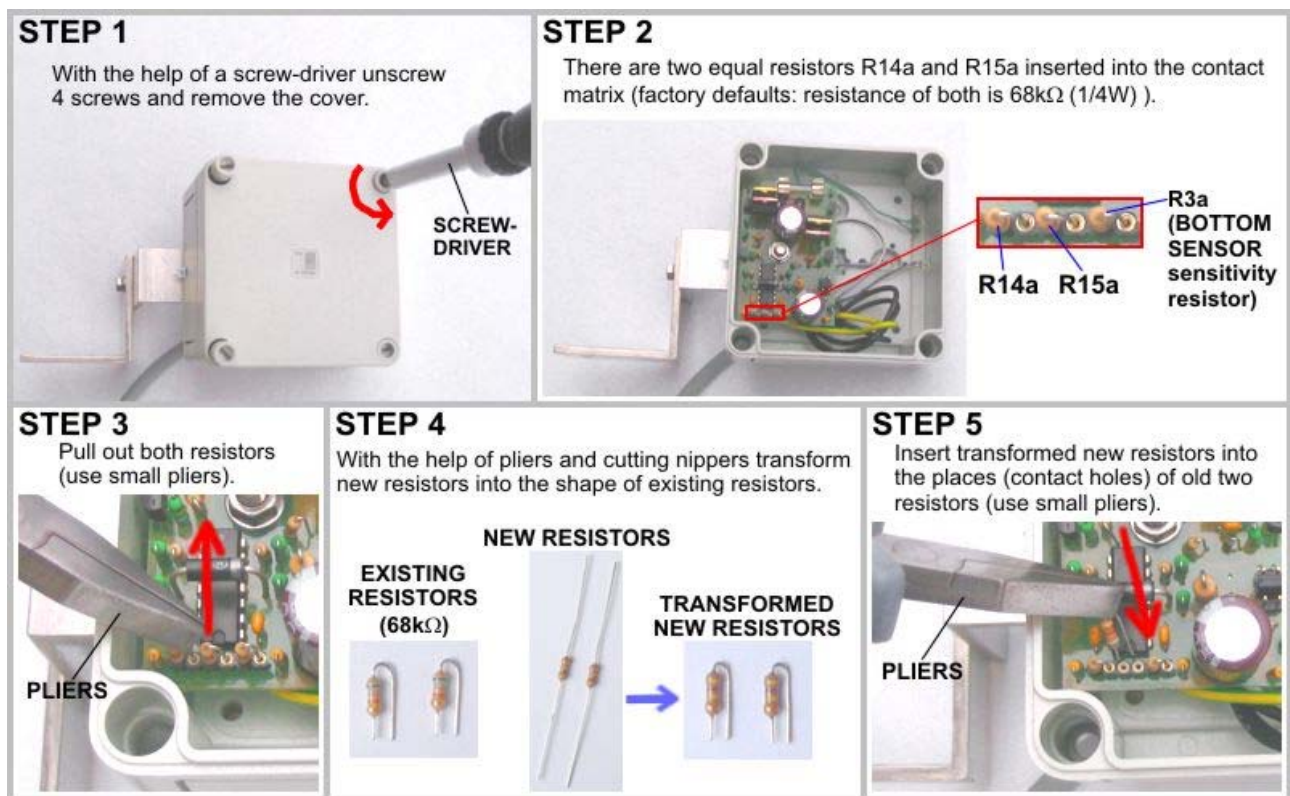


Figure 5: Changing the tracking accuracy (changing R14a and R15a)

When you finish clean (if necessary) the PU seal (on the bottom of the cover) that assure watertightness, precisely place the cover back and gently screw all four screws down.

There is one more thing that can be adjusted (For experienced users only!). By changing the resistor marked as R3a on **Figure 5** (step 2) you can **adjust the sensitivity of bottom sensor** which is used for early morning return of the tracker to the east. The default resistance of resistor R3a is 1,5 kΩ. If

you increase the resistance of R3a the sensitivity of bottom sensor decreases and if you decrease the resistance of R3a the sensitivity increases. If you remove the resistor R3a the bottom sensor is disabled. You change it in the same way you change tracking accuracy resistors. Please note that this feature is intended to be used by experienced users only.

You noticed that changing accuracy with the help of ordinary resistors is somehow unusual. You are right, usually things like that adjust with potentiometers. But potentiometers are not reliable enough because its resistance can change in a few years (oxidation) and parameters of certain device also. For the ultra reliable FUSIONSEEKER that is intolerable. But in the other hand ordinary resistors have very time stable resistance. That's why we invented this unique setting of accuracy. This "contact matrix" has simultaneously another advantage. If you screw up something you can always insert old resistors and return old tracking accuracy what is in case of potentiometers practically impossible.

3.3 Mounting FUSIONSEEKER on the solar "receiver"

First look at the **Figure 6** where the most common types (rotation axes) of single-axis tracking are shown:

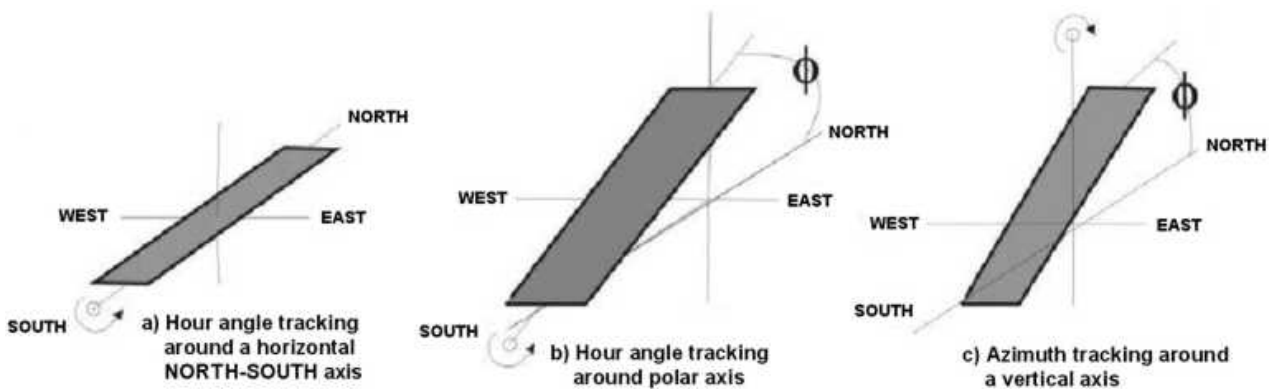


Figure 6: Rotation axes of single-axis tracking (shown for northern hemisphere)

Each of those rotation axes has some advantages and also some disadvantages. But what is important FUSIONSEEKER DS-50S5 **is suitable for all possible rotation axes.**

Essential for tracking is the location on the solar "receiver" where DS-50S5 shall be mounted on. That location depends on global position of the tracker (solar "receiver") as follows:

a) If your tracker (solar "receiver") is positioned somewhere in the northern hemisphere of the earth mount DS-50S5 on the north-east corner of your solar "receiver" as it's shown on Figure 7:

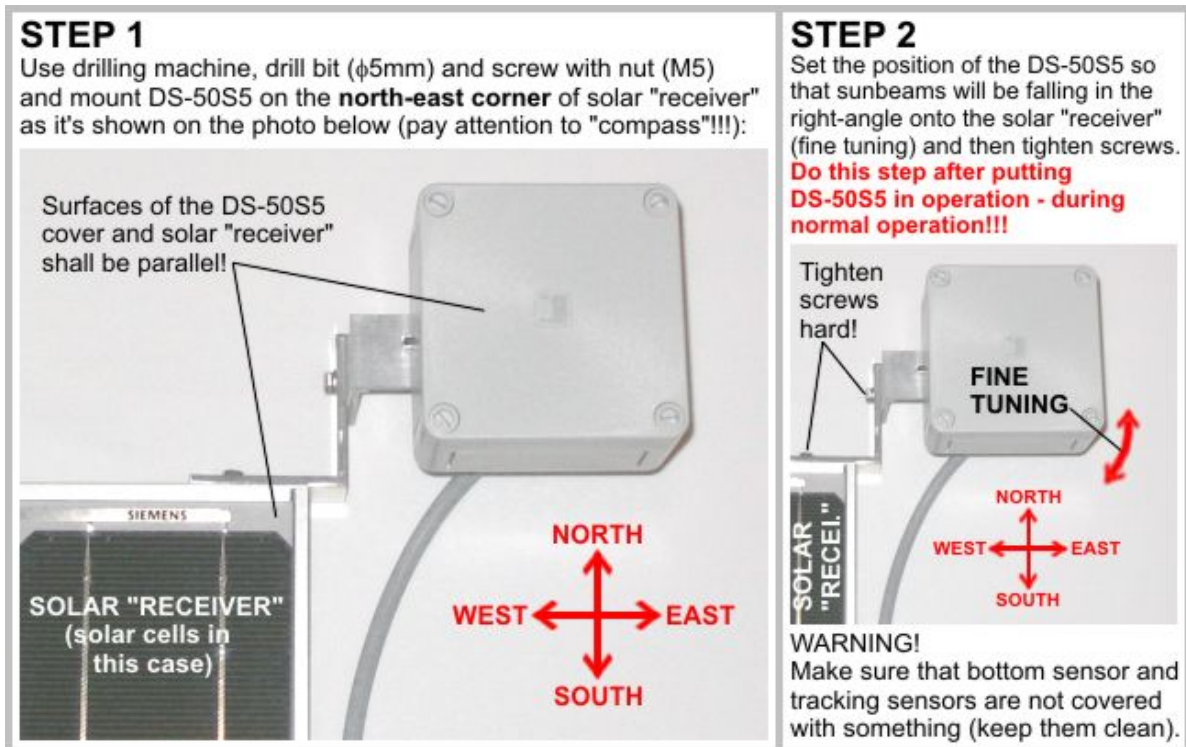


Figure 7: Mounting DS-50S5 on the solar "receiver" (northern hemisphere)

b) If your tracker (solar "receiver") is positioned somewhere in the southern hemisphere of the earth mount DS-50S5 on the south-east corner of your solar "receiver" as it's shown on Figure 8:

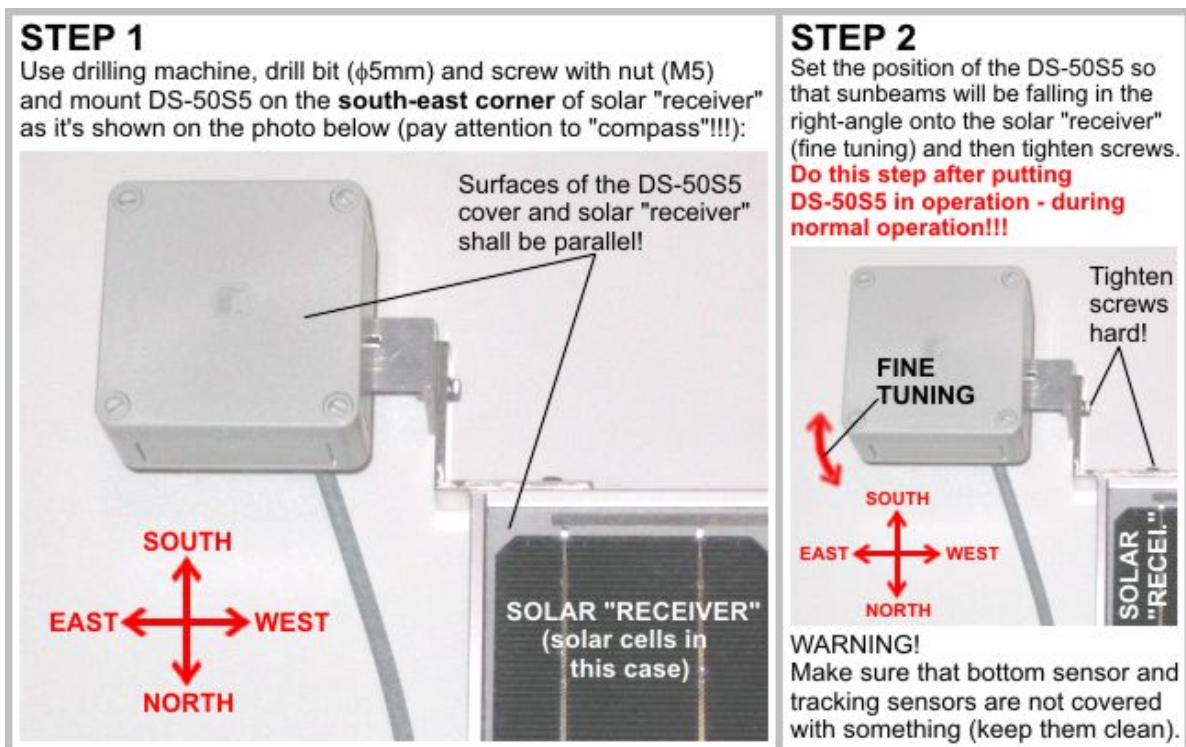


Figure 8: Mounting DS-50S5 on the solar "receiver" (southern hemisphere)

3.4 Connecting FUSIONSEEKER to supply voltage and motor

FUSIONSEEKER DS-50S5 has one 4-wire connection cable. Two wires are used to connect it to supply voltage and the other two are used to connect it to permanent magnet DC motor.

DS-50S5 can be powered from any external power supply or battery bank. Powering it directly from solar cells is not possible (not supported!).

Before you start you have to check two conditions:

a) If continuous motor current ($I_{out,cont.}$) is equal or lower than 5A (when motor is fully loaded) the first condition for connecting the motor to DS-50S5 is satisfied.

b) You have to be careful that FUSIONSEEKER's maximum allowed motor current ($I_{out,max} = 20A$) is not exceeded during motor startup. This maximum motor current ($I_{motor,max}$) depends on supply voltage (U_{in}) you are going to use and on resistance of motor's coil (R_m) (you can measure it with ohm-meter when motor is not running!). When you have both values you calculate your maximum motor current ($I_{motor,max}$) with the help of the following formula: $I_{motor,max} = U_{in} / R_m$

If maximum motor current ($I_{motor,max}$) does not exceed 20A and if continuous motor current ($I_{out,cont.}$) does not exceed 5A (first condition) you can connect your motor!

Here are some examples of calculating $I_{motor,max}$:

Example 1: $I_{motor,max} = U_{in} / R_m = 12V / 0,8\Omega = 15A \rightarrow$ you can connect your motor

Example 2: $I_{motor,max} = U_{in} / R_m = 36V / 1,8\Omega = 20A \rightarrow$ you can connect your motor

Example 3: $I_{motor,max} = U_{in} / R_m = 48V / 1,9\Omega = 25,3A \rightarrow$ you can not connect your motor

The next step is calculating the minimal size (cross-sectional area in mm^2) of wires for 2 cables (copper wires!!!) you will use to connect DS-50S5 to supply voltage and motor (4-wire connection cable of DS-50S5 is short!).

The minimal size for 1 wire of 2-wire motor cable you will use depends on **the length of that 2-wire motor cable** and on **actual continuous motor current**. You calculate it using the following formula:

Minimal size for 1 wire of cable [mm^2] = $\{(0,036) \times (\text{cable length}[m]) \times (\text{cont. motor current}[A])\} + 0,8$

Example: cable length = 12m; actual continuous motor current = 5A;

Minimal size for 1 wire of cable [mm^2] = $\{(0,036) \times (12) \times (5)\} + 0,8 = 2,96mm^2$

Use first higher standard size; in this case use 2-wire cable with one wire size of $4mm^2$ (shortly: 2 x $4mm^2$ cable)

To calculate the minimal size for 1 wire of 2-wire power supply cable use the same formula. Current value (cont. motor current) stays the same just take into account **power supply cable length**.

Finally, if you satisfy **all** conditions and you have cables you can now physically connect DS-50S5.

All 4 wires of connection cable are marked (number or colour):

- To wire marked with "1" connect **positive power supply wire (+U)**
- To wire marked with "2" connect **negative power supply wire (-U)**
- To wire marked with "3" connect **one motor wire**
- To wire marked with "yellow/green" colour connect **the other motor wire**.

First connect motor cable to motor and **after that** connect power supply cable to your power source (supply voltage) – of course you have to set suitable voltage range before!!!

When you finish FUSIONSEEKER DS-50S5 starts working. If you don't have luck your tracker will be turning in the opposite direction. Don't worry, just disconnect DS-50S5 from power source, substitute motor wires in motor's junction-box, connect power supply back and the system will now work properly. We would tell you how to properly connect motor in the first "attempt" but it's impossible due to very large number of different actuators on the market.

WARNING! Be careful, always connect FUSIONSEEKER's number "1" wire to positive terminal of power source and number "2" wire to negative terminal of power source!!! You can damage DS-50S5 if you make a mistake.

FUSIONSEEKER DS-50S5 is also equipped with **6,3A FUSE** (please look at **Figure 2** (step 2)). If something goes wrong and input current increases to more than 6,3A for a long time this fuse will blow and thus protect DS-50S5 in most cases. If this happens repair the fault, replace the fuse with new one (glass fuse dimensions 5x20mm rated at 6,3A fast blow) and everything will probably work again. "It's probably" because this fuse can not protect DS-50S5 against very high short circuit current on motor side!

3.5 The use of limit switches

Limit switches are always important part of each tracker because they protect actuator (motor) by stopping it slightly before physical rotational limits of the tracker are reached. Rotational limits could be reached in case something goes wrong or when the tracker mechanics is normally not capable of rotating for example more than ± 70 degrees. Although FUSIONSEEKER DS-50S5 was designed to work even without limit switches (in case tracker's rotational limits are normally never reached) we recommend you to use it. So, install limit switches as it's shown on **Figure 9**.

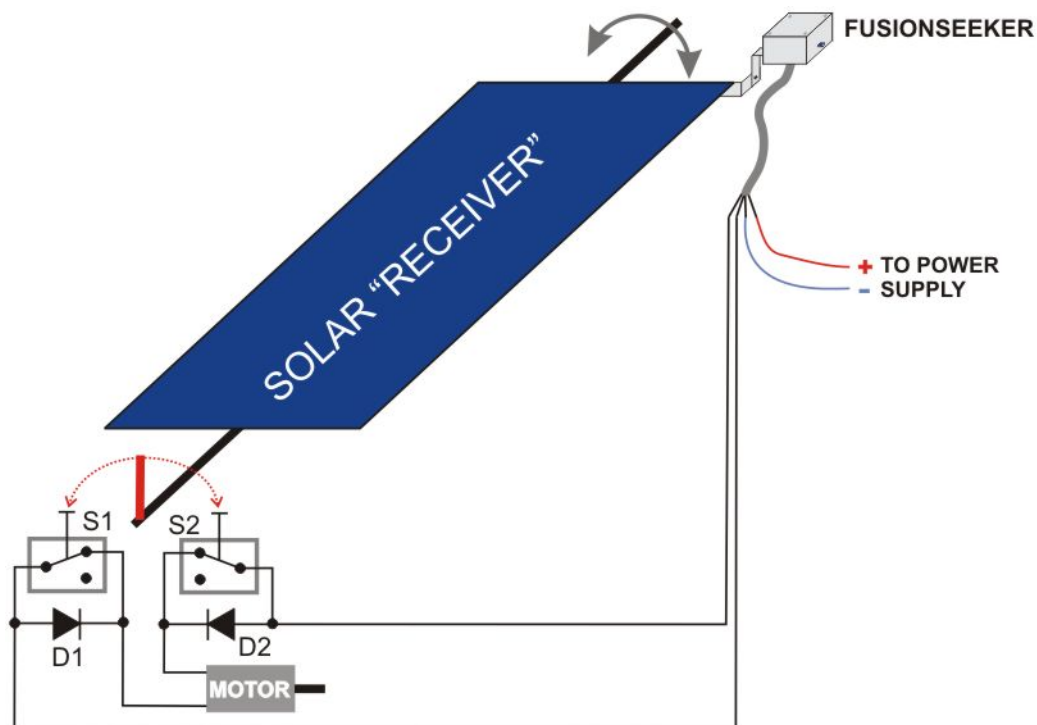


Figure 9: Installing the limit switches

During installation of limit switches S1 and S2 you have to be careful to set them in the way they will turn off the actuator motor slightly before rotational limits of the tracker are reached. Also be careful to use enough powerful limit switches (S1 and S1) and diodes (D1 and D2).

If you don't have luck limit switches, although properly activated, won't turn off the motor. In this case immediately disconnect DS-50S5 from the power source, then substitute leads of diode D1 and substitute leads of diode D2, connect power supply back and limit switches will work properly.

3.6 Grounding

The housing of FUSIONSEEKER DS-50S5 is made of polycarbonate and thus can not be grounded. The only conducting part of DS-50S5 is its aluminium mounting bracket which **must be connected to system ground**.

WARNING! Never ground motor wires! Motor wires must be connected to motor terminals and nowhere else otherwise short circuit will occur and your DS-50S5 will possibly be permanently damaged.

4. RECOMMENDATIONS FOR SOLAR TRACKER STRUCTURE

- **The solar tracker structure including actuator shall be so strong that it can withstand even strongest winds!**
- **The solar tracker structure shall be as stiff as reasonably achievable!** Explanation: Stiff structure assures that tracker can not sway in the wind – left, right, left, right, left,... FUSIONSEEKER DS-50S5 can detect this swaying as deviation in sun tracking and it every time turns on the motor in one and the other direction what means that tracker **oscillates**. Oscillations can harm actuator's motor or even DS-50S5 (in case of large startup currents). Take into account that stiffness of the tracker structure has to be higher if higher accuracy is set.
- **Actuator (or gear drive) has to be high quality – without clearance!** Explanation: Actuator's clearance can cause oscillations in windy conditions in the same way as low stiffness.
- **The speed of rotation of the solar tracker shall not be faster than 36° per minute (5 minutes for 180° turn) in general.** Explanation: The motor can not stop in zero seconds and it rotates a little bit further (because of persistence). DS-50S5 can detect this as deviation in sun tracking and it turns on the motor in the other direction to "repair" the error. If this is repeating oscillations are here. But if recommended tracker's speed of rotation is considered this type of oscillation can not occur because DS-50S5 has built in electronic motor brake which stops the motor immediately after it's turned off (almost in zero seconds!!)
- **Mount solar tracker in the place where nearby objects can never shadow it!**

5. WARRANTY

Fusionseeker Solar Tracker Controllers (*a division of Sončna energija d.o.o., Kidriceva ulica 25, 3000 Celje, SLOVENIA (E.U.)*) warrants its product to the original consumer purchaser that it will repair, or replace, any product that is determined to be defective for the following terms:

One year from date of purchase on all components.

To be eligible for repair or replacement under this warranty, the product in question must be sent to Fusionseeker Solar Tracker Controllers (to workshop – address is shown below) within the warranty period and the original consumer purchaser must comply with the following conditions:

- The product thereof must not have been modified or altered in any way by an unauthorized source.
- The product thereof must have been installed in accordance with the installation instructions.

This limited warranty does not cover:

- Damage due to improper or installation;
- Accidental or intentional damage;
- Misuse, abuse, corrosion, or neglect;
- Product impaired by severe conditions, such as excessive wind, ice, storms, lightning strikes or other natural occurrences;
- Damage due to improper packaging on return shipment.

Any and all labor charges for troubleshooting, removal or replacement of the product are not covered by this warranty and will not be honored by Fusionseeker Solar Tracker Controllers.

Return shipping is to be pre-paid by the original consumer purchaser. Fusionseeker Solar Tracker Controllers will pay the normal return shipping charges within the European Union countries only.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES OF ANY KIND, EXPRESSED OR IMPLIED, INCLUDING (WITHOUT LIMITATION) ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY NONCONTRACTUAL LIABILITIES BASED UPON NEGLIGENCE OR STRICT LIABILITY. IN NO EVENT SHALL FUSIONSEEKER SOLAR TRACKER CONTROLLERS BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING (WITHOUT LIMITATIONS) ANY DAMAGE FOR PERSONAL INJURY OR PROPERTY DAMAGE OR OTHER PRODUCT LIABILITIES BASED UPON ALLEGED NEGLIGENCE OR BREACH OF EXPRESS OR IMPLIED WARRANTIES OR STRICT LIABILITY. FUSIONSEEKER SOLAR TRACKER CONTROLLERS NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER OBLIGATION IN CONNECTION WITH THE SALE OF ITS PRODUCTS. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU ALSO MAY HAVE OTHER RIGHTS THAT MAY VARY FROM COUNTRY TO COUNTRY. SOME COUNTRIES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY WILL LAST OR THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.

Address of Fusionseeker Solar Tracker Controllers workshop:

Dejan Skrivalnik
Pisece 20
8255 Pisece
SLOVENIA (E.U.)
Phone: 00-386-41-937-343
E-mail: fusionseeker@gmail.com